

NOTE: TRK-1903 used for mounting LCD monitor TLM-1903 onto 19" standard rack.

Installation Instruction:

Check the components in the box:

- A. Side Flange Component, (x2)
- B. Adjustable screw set (x2, within "A")
- C. Back cover, (x1)
- D. Screw, flat head, phillips, M4 length 10mm, (x4)
- E. Screw, pan head, phillips, M4 length 10mm, (x4)

INSTALLATION:

1. Take off base from monitor.
2. Flip monitor face down on a flat, safe surface.
3. Install Side Flange Component "A" to left and right sides of the monitor by using 4 screws "D", see Fig 1.
4. Install Back Cover "C" on the back of monitor by using 4 screws "E", see Fig 1.
5. Mount monitor onto the rack, by using 4 pieces mounting screws to secure: M5, length 10mm, pan or truss head, phillips drive. (these screws are provided by rack manufacturer), mounting screws secure at top and bottom, see Fig 2.
6. Tighten or loosen screw sets "B" at the back of the monitor for desirable tilting, if necessary.

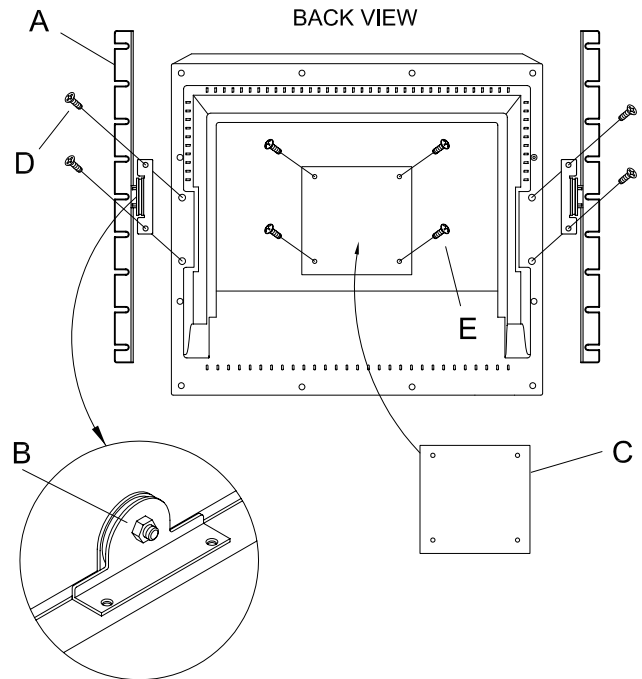


FIG. 1

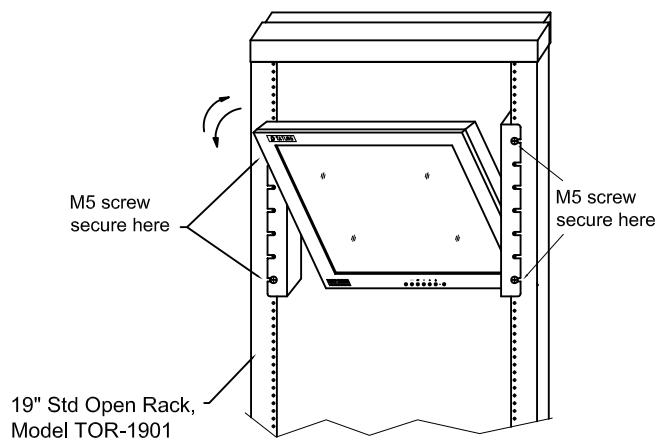


FIG. 2